

# SwimPro™ by HAYWARD®

FILTRATION SYSTEMS

The secret to  
crystal clear water!



The value priced SwimPro high rate sand filter range by Hayward is manufactured in the United States of rugged, durable, color-fast molded polymeric material to assure long life.

Each filter features a high efficiency top diffuser and innovative under-drain to assure balanced flow and maximize the filter's backwash performance. The top diffuser evenly distributes the unfiltered water across the entire sand media bed, in a cascading umbrella like pattern. SwimPro's included multi-port control valve features up to seven positions to quickly and easily backwash the filter to clean the sand bed of dirt and debris.

The SwimPro filter is virtually maintenance free and value priced thanks to advanced USA manufacturing efficiencies. Choose SwimPro by Hayward for affordable and efficient pool filtration.





**7-Position Vari-Flo Control Valve**  
allows you to easily dial any of the 7-valve/filter functions for easier operation and maximum efficiency

**Flange Clamp**  
allows 360° rotation of valve to simplify plumbing


**Advanced Underdrain System**  
for smooth efficient flow and totally balanced backwashing

**Balance Diffuser**  
for even water distribution


**One-piece Molded Design**  
including integral molded-in base

**Filter Tank**  
made of rugged, colorfast polymeric material for dependable, all-weather performance and 50 psi (3.5 bar) working pressure

**Integral Bottom Drain**  
Large size for rapid draining

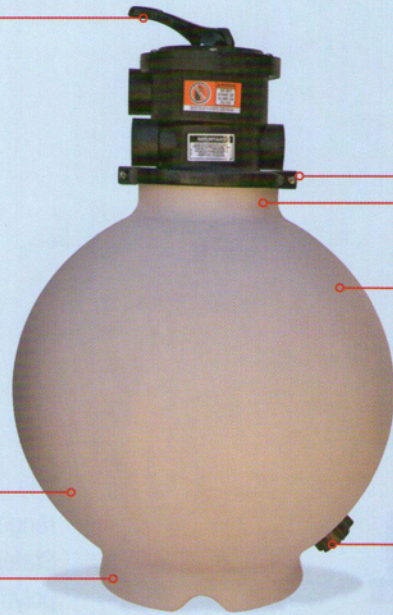

The SwimPro filtration system offers full-flow technology that provides crystal clear water and good, clean fun for the entire family.



### Underdrain Features and Benefits

- Innovative design
- Engineered for full-flow
- Balanced backwashing
- No service assembly

### Performance Data

Model	Filtration Area	Design Flow Rate	Pressure Loss at Design Flow Rate	Turnovers 8 Hours	Sand Required
	M <sup>2</sup> (FT <sup>2</sup> )	M <sup>3</sup> /H (GPM)	Bars (PSI)	M <sup>3</sup> (Gallons)	kgs. (lbs.)
VL210T 520 mm (21")	0.20 (2.15)	6.3 (35)	0.01 (1.73)	50.4 (16,800)	68 (150)
VL240T 600 mm (24")	0.29 (3.12)	9.0 (50)	0.02 (3.46)	72 (24,000)	90 (200)
VL270T 685 mm (27")	0.34 (3.66)	10.8 (60)	0.03 (5.19)	86.4 (28,000)	135 (300)



**Vari-Flo™ 7-Position Control Valve**  
with easy-to-use lever-action handle lets you "dial" any of seven valve/filter functions

